

**FEATURE a unique proven design**

**SI 240 / 260**

**TECHNICAL DATA**

**SI 240 / 260**

The **SI 240 Regulator** was created in response to the industry's need for a **High Pressure, Springless, Tied Diaphragm Regulator** and the **SI 260 Regulator** for a **High Flow, High Pressure, Springless, Tied Diaphragm Regulator** for specialty source gas service, i.e. gas cabinets. The design and materials of construction, plus some unique features make it an ideal choice for gas source applications with reactive and hazardous gases the Semiconductor and Allied Industries use.

- Unique features include a special leak test port that enables the diaphragm seal to be outboard leak tested <math>10^{-9}</math> mbar.l./sec range at high pressure.
- Precise control of the gas discharge with minimum deviation caused by the supply pressure effect.
- Counter balance springs outside the gas stream to ensure the unit functions correctly with downstream vacuum and upstream high pressure
- A unique spherical ball pressure pad to give ultra smooth delivery pressure adjustment
- Choice of delivery pressure: 2, 4 or 7 bar / 30, 60 or 100 psi

The **SI 240** regulator is designed with minimum face to face dimensions, to meet the requirements of all gas system manufacturers. The **SI 260** regulator is designed for high flow rates of HCl and N<sub>2</sub>O etc.

Individual Serial number, for full traceability

Ergonomic Design

Metal to metal seal to atmosphere

Spherical ball for ultra smooth control

Sealed bonnet for extra protection

Minimal wetted surfaces for optimal purging

Gas specific solutions (Body and Seat Materials)

Assembling, testing & Packaging in cleanroom Cl. 10


Controlled (PC) electropolishing for better corrosion resistance

No spring in the wetted area for zero particle emission

2,3,4 or 6 ports options available

diaphragm counter balance springs


Excellent response at high and low pressures (droop, hysteresis, creep)

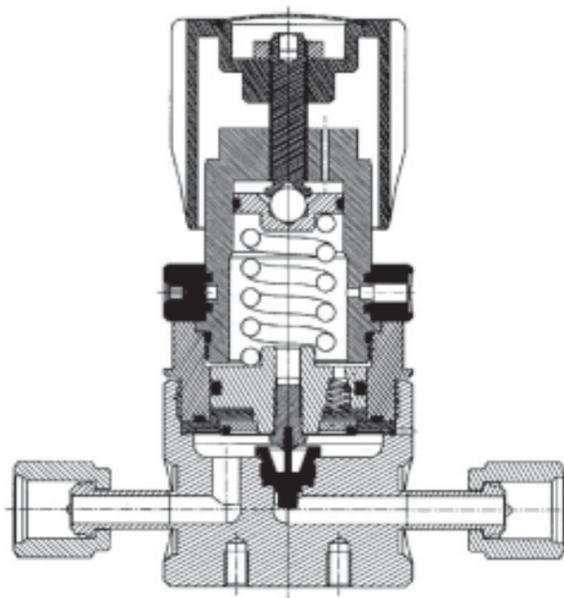


Manufactured to the **THREE STAR PROCESS®**

TECHNICAL DATA	
Fluid Media	Standard, High and Ultra High Purity, corrosive and non-corrosive gases
Inlet pressure	240 bar (3500 PSI)
Outlet pressure	2 - 4 - 7 bar (30 - 60 - 100 PSI)
Temperature range	-20°C to + 80°C (-2F to 176F)
Nominal Flow	150 slpm (N <sub>2</sub> )
Flow Coefficient (C <sub>v</sub> )	SI 240: C <sub>v</sub> = 0,09 / SI 260: C <sub>v</sub> = 0,2
Certified max. Helium inboard leak rate	< 1.10 <sup>-9</sup> mbar.l./sec
Certified max. Helium outboard leak rate (at max. pressure)	< 1.10 <sup>-9</sup> mbar.l./sec
Certified max. Helium across the seat leak rate (at max. pressure)	< 1.10 <sup>-9</sup> mbar.l./sec
Number of ports	2, 3, 4, 5 or 6


**FLOW CURVES**

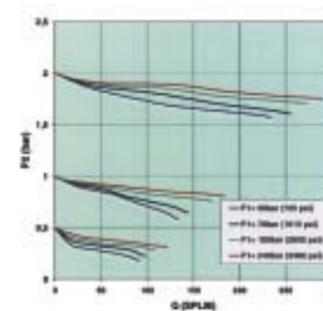

SI 240

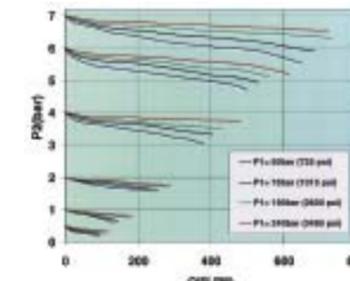

SI 260


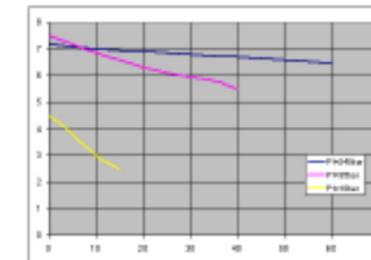


**CONSTRUCTION MATERIALS**

**DIMENSIONS**

	Parts	Materials
Wetted parts	Body	AISI 316L, VAR, Hastelloy®
	Diaphragm	Hastelloy®
	Seat	PCTFE (Kel-F®) / PI (VespeI®) / PVDF
	Poppet	AISI 316L, VAR, Hastelloy®
Non-wetted parts	Bonnet	Nickel Plated Brass
	Handle	Extruded Plastic
	Others	Stainless Steel or others

SURFACE FINISH		
U: < Ra 0,15µm Ep. (6µin Ra)	V: < Ra 0,25µm Ep. (10µin Ra)	S: < Ra 0,4µm nonEP(15µin Ra)

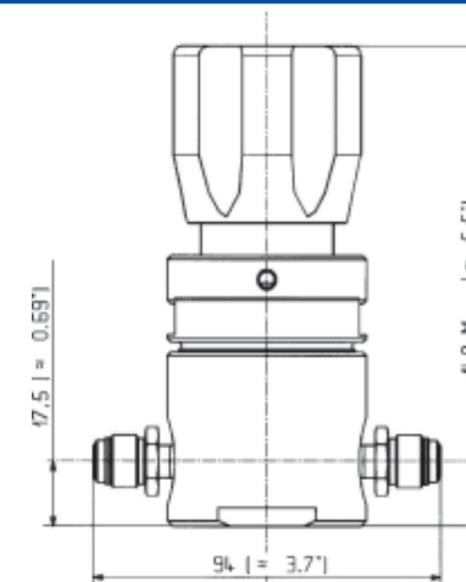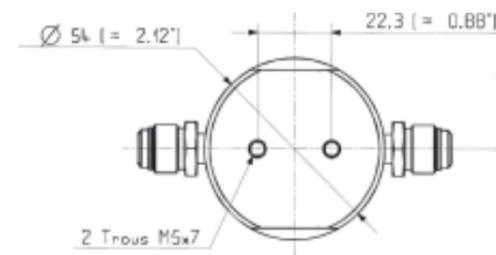

PART NUMBER							
Example :	SI 240 U	2V1	A	/	K	7b	A/B : V-M
	1	2	3		4	5	6

1 - Serie & Surface Finish
SI 240/260 U Ra 0,15µm Ep. (6µin Ra)
SI 240/260 V Ra 0,25µm Ep. (10µin Ra)
SI 240/260 S Ra 0,4µm nonEP(15µin Ra)


2 - Ports Configurations
2V1 2 ports in line
See below for other ports configurations

3 - Body Material (others on request)
A AISI 316L, VAR
I AISI 316L
H Hastelloy® (on request)

4 - Seat Material
K PCTFE (Kel-F®)
V PI (VespeI®)
P PVDF

5 - Outlet regulated Pressure
2b 2 bar - 30 PSI
4b 4 bar - 60 PSI
7b 7 bar - 100 PSI
Note : Inlet Pressure: upto 240 bar (3500 PSI)

6 - End Connections
V-F GAZEL® 1/4" - Female (face seal)*
V-M GAZEL® 1/4" - Male (face seal)*
V-FI GAZEL® 1/4" - Internal (face seal)*

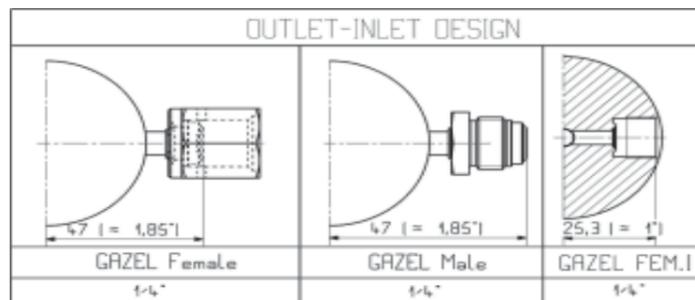

Configurations					
2V1	3V3	3V4	4V5	4V6	4V9
5V7	5V8	5V10	5V11	6V2	

\*All GAZEL® Face Seals are VCR® compatible. VCR® is a registered trade mark of CAJON CO., HASTELLOY® is a registered trade mark of CABOT Corp., Kel-F® is a registered trade mark of DUPONT, ELGILOY® is a registered trade mark of ELGILOY Company.



# SELFA

## Valves & Fittings

A total component solution, from source to process

**SI 240 / 260**  
**SPRINGLESS TIED DIAPHRAGM**  
**PRESSURE REGULATOR**  
**FOR UHP APPLICATIONS**

**SI 240**  
**SI 260**

